

AirKing[®]

Ventilation Products

SPECIFICATIONS
AK300LS
 EXHAUST FANS

310 CFM/3.5 SONES @ 0.10" wg. • 290 CFM/3.5 SONES @ 0.25 wg.
HVI CERTIFIED 120 Volts, 0.75 amps, 60 hz.

• **Grill**

White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 14⁵/₁₆" x 14⁵/₁₆".

• **Blower Wheel**

Balanced polymeric dual inlet blower wheel 6" dia. x 5³/₈" depth, 59 paddles, secured in place using 8M hex nut.

• **Motor**

Enclosed 4 pole electronically balanced permanently split capacitor motor (PSC); life time lubrication, suitable for continuous operation. Motor bearings - sleeve. Rated 115/120 volts, 60 Hz, 0.75 amps.

• **Fan Housing**

23 gauge galvanized steel housing. Overall dimensions 12⁷/₈" x 12³/₄" x 9⁷/₈".

• **Duct Collar**


6" round, zinc plated metal collar adapter. 6" spring loaded aluminum backdraft damper.

• **Ventilating Area**

For bathrooms up to 310 sq. ft. For other rooms up to 385 sq. ft.

• **Electrical Connections**

1/2" electrical knockouts provided. Easy wiring access via either internal or external wiring compartment cover.

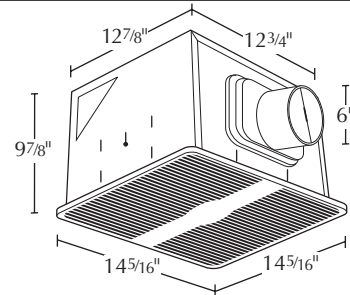

CUL/HVI

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.

• **Unit Mounting**

The housing will mount through drywall thickness up to 3/4", with a rough-in opening of 13¹/₈" x 13". Rated for ceilings insulated to R-40. The housing will mount either between 16" or 24" on center joists, using the 2 supplied housing mounting brackets. The housing mounting brackets can be adapted for overhead mounting (hardware not provided). The unit is provided with an optionally installed ceiling flange to ensure proper building infiltration rates are maintained and that no air leaks occur between the fan housing and ceiling cutout.

• **Single Pack Shipping Info**

Box Dim: 20" x 15¹⁵/₁₆" x 11³/₈"
 UPC: 0-8316223002-7
 Shipping Weight: 17 lbs.

PERFORMANCE											
	Static Pressure (inches of w.g.)								HVI Sones @ .1 SP	Fan Speed RPM	Power Watts
	0	0.05	0.1	0.15	0.2	0.25	0.3	0.35			
Air Flow - CFM	320	315	310	304	299	290	285	275	3.5	1200	80

PROJECT							ARCHITECT				
LOCATION							ENGINEER				
CONTRACTOR							SUBMITTED BY			DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		



U.S.: 820 Lincoln Drive
 West Chester, Pennsylvania 19380-4466
 Tel: (877)-304-3785
 Fax: (610) 696-8048

Canada: 110 Glidden Road
 Brampton, Ontario L6T 2J3
 Tel: (905) 456-2033
 Fax: (905) 456-1015