



SPECIFICATIONS
PIN30
 RANGE HOODS

Professional Series Insert Power Unit Insert

• **Dimensions**

Overall bottom projection: 18"
 Height: 12"
 Overall Width: 32"

• **Hood**

All metal cold rolled with stainless steel fascia.

• **Lighting**

2 - PAR16 medium screw base, 45 watt maximum Halogen lamps (not included).

• **Ducting Options**

Vertical or Horizontal ducting through ducting transition (not included) specified for size of motor.

• **Cut Out Opening Size**

Width: 30.5"
 Depth: 17.25"

• **Filters**



Grease Baffles: Dishwasher safe,
 Stainless Steel baffles (included).

• **Available Finishes**

Stainless Steel

• **Shipping Information**

UPC: 0-8316219791-7

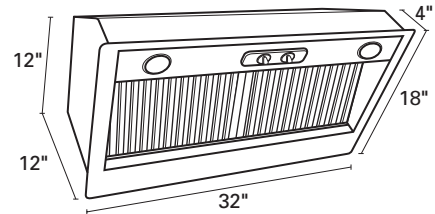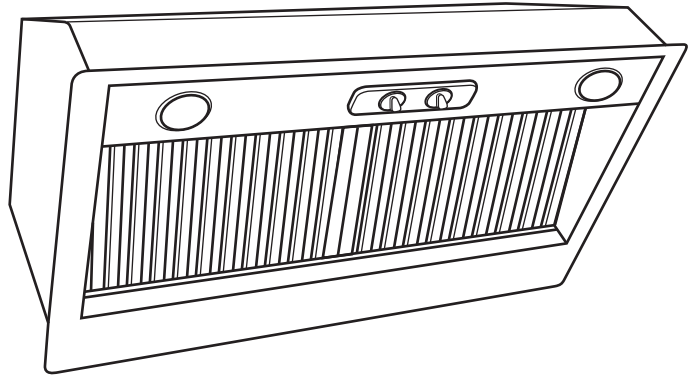

POWER USAGE		
Motor Size	Full Load Amps	Breaker Size
300 CFM	1.7 amps	15 amp
500 CFM	1.9 amps	15 amp
600 CFM	2.1 amps	15 amp
900 CFM	6.5 amps	15 amp
1200 CFM	8.0 amps	15 amp

Breaker Size is listed at the recommended minimum size. Installation must be in accordance with all applicable codes and standards.

PROJECT							ARCHITECT		
LOCATION							ENGINEER		
CONTRACTOR							SUBMITTED BY		DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS



U.S.: 820 Lincoln Drive
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada: 110 Glidden Road
 Brampton, Ontario L6T 2J3
 Tel: (905) 456-2033
 Fax: (905) 456-1015