



SPECIFICATIONS
AP-300
SERIES
 RANGE HOOD

HVI 2100
 CERTIFIED **300 CFM/1.5 Sones @ 0.10" SP.**

• **Hood Dimensions**

Overall bottom projection - 24"
 Available heights (without Soffit) - 10" and 18"
 Available widths: 30" and 36"

• **Hood**

Stainless steel. Wall mounted. Install at least 24" above the cooking surface.

• **Lighting**

3 - PAR16, 3.125" in length, type A, screw-in base, 45 watt maximum Halogen lamps (included).

• **Ducting Options**

Vertical outlet only. Vertical or Horizontal ducting transition achieved through vertical or horizontal duct adapter (included).

• **Filters**





Aluminum grease filters (included).

• **Blower**

Single speed, permanently split capacitor motor. Rated 120 volts, 60 hz.

• **Blower Wheel**

Dual inlet, electronically balanced polymeric centrifugal blower wheels, 57/8" width 59 paddles.

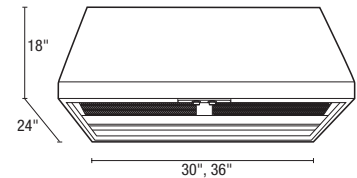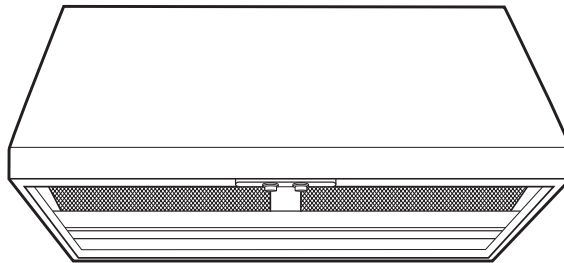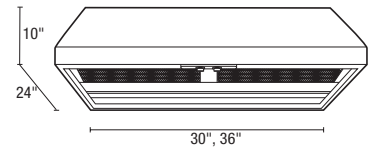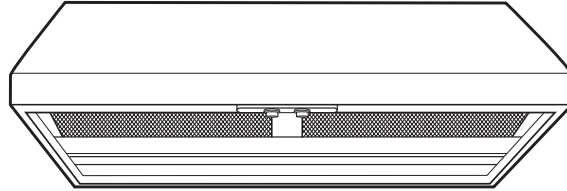

EXPANDED PERFORMANCE										
Air Flow - CFM	Static Pressure (inches of w.g.)						Sones @ .1 SP	Fan Speed RPM	Power Watts	Amps
	0	0.1	0.20	0.25	0.3	0.375				
	317	300	279	267	253	229	1.5	798	95.0	.90

PROJECT							ARCHITECT			
LOCATION							ENGINEER			
CONTRACTOR							SUBMITTED BY			DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



Air King: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048