



SPECIFICATIONS

**AP-500
SERIES**
RANGE HOOD



500 CFM/4.5 Sones @ 0.10" SP.
300 CFM/1.5 Sones @ 0.10" SP.

• **Hood Dimensions**

Overall bottom projection - 24"
Available heights (without Soffit) - 10" and 18"
Available widths: 30" and 36"

• **Hood**

Stainless steel. Wall mounted. Install at least 24" above the cooking surface.

• **Lighting**

3 - PAR16, 3.125" in length, type A screw-in base, 45 watt maximum Halogen lamps (included).

• **Ducting Options**

Vertical outlet only. Vertical or Horizontal ducting transition achieved through vertical (included) or horizontal (optional) outlet adapter.

• **Filters**





Aluminum grease filters (included).

• **Blower**

Two speed, permanently split capacitor motor. Rated 120 volts, 60 hz.

• **Blower Wheel**

Dual inlet, electronically balanced polymeric centrifugal blower wheels, 5⁷/₈" width 59 paddles.

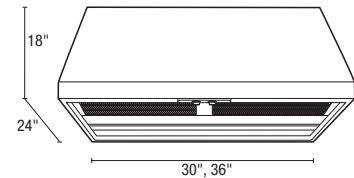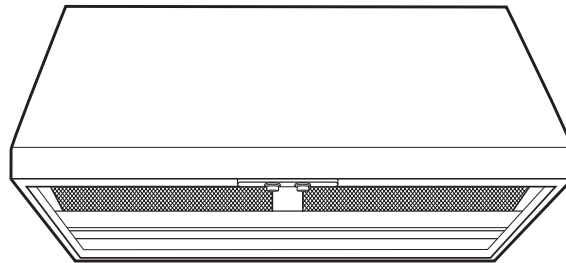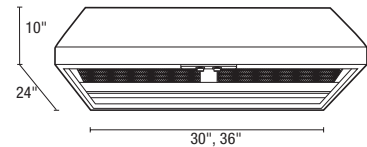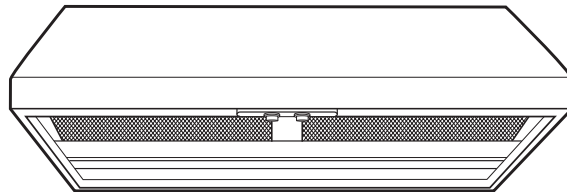

EXPANDED PERFORMANCE

Air Flow - CFM	Static Pressure (inches of w.g.)						Sones @ .1 SP	Fan Speed RPM	Power Watts	Amps
	0	0.1	0.25	0.375	0.5	0.625				
High Speed	529	500	444	382	278	116	4.5	1206	131	1.25
Low Speed	317	300	267	229	167	-	1.5	760	95	.90

PROJECT							ARCHITECT				
LOCATION							ENGINEER				
CONTRACTOR							SUBMITTED BY			DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		



U.S.: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada:
Brampton, Ontario
Tel: 800-250-8767
Fax: (905) 456-1015