




SPECIFICATIONS
BFQ50W
 EXHAUST FANS

HVI 2100 CERTIFIED
50 CFM/0.8 Sones @ 0.10" SP.
44 CFM @ 0.25" SP.

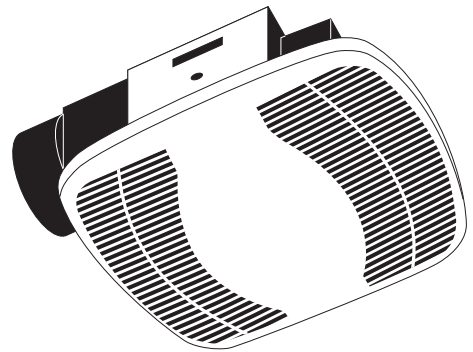

- **Grill**
 White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 10" x 10".
- **Blower Wheel**
 One piece polymeric wheel 5 1/8" diameter, 2 3/8" wide, with 48 fins.
- **Motor**
 Heavy duty, permanently split capacitor, plug-in, 4 pole motor, life time lubrication, thermally protected, suitable for continuous operation. Rated 120 volts, 60 hz.



Oval duct collar allows fan to be installed into walls using standard 2" x 4" studs.

- **Fan Housing**
 PC/ABS polymeric, dimensions 8 1/2" x 9 1/8" x 3 7/8".
- **Oval Duct Collar**
 Plastic collar for 4" duct connection, comes complete with built in non-metallic back draft damper for quiet operation. Oval design accepts standard 4" round ducting and fits into standard 2" x 4" walls.

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.



- **Ventilating Area**
 For bathrooms up to 45 sq. ft. For other rooms up to 60 sq. ft.
- **Single Pack Shipping Info**
 Box Dim: 11" x 12" x 6"
 Shipping Weight: 5 1/4 lbs.

- **Unit Mounting**
 Designed to mount in walls or ceilings with at least 4" of clearance. The unit is mounted directly to the joist or stud using a separate lock-in bracket (included with unit). The housing will mount through drywall thickness up to 3/4", with a rough-in opening of 8 1/2" x 9 1/8".

Suitable for wall insert mounting when discharged vertically and mounted outside of shower enclosure

EXPANDED PERFORMANCE										Sones @ .1 SP	Fan Speed RPM	Maximum Fan Watts	Amps
Static Pressure (inches of w.g.)													
	0	0.1	0.125	0.15	0.2	0.25	0.3	0.35					
Air Flow - CFM	52	50	49	48	47	44	41	35	0.8	1064	16.1	0.3	

PROJECT					ARCHITECT				
LOCATION					ENGINEER				
CONTRACTOR					SUBMITTED BY				DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS



Air King: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048