




SPECIFICATIONS
BFQ70W
 EXHAUST FANS

HVI 2100 CERTIFIED
70 CFM/1.5 Sones @ 0.10" SP.
56 CFM @ 0.25" SP.

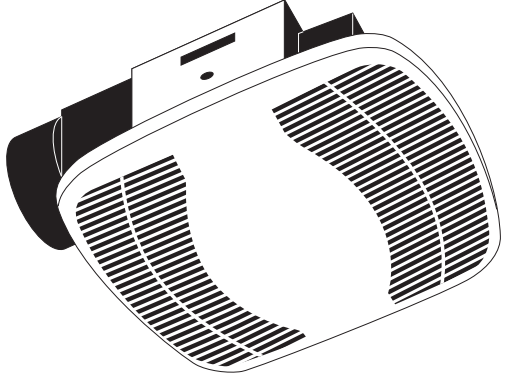

• **Grill**
 White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 10" x 10".

• **Blower Wheel**
 One piece polymeric wheel 5 1/8" diameter, 2 3/8" wide, with 48 fins.

• **Motor**
 Heavy duty, permanently split capacitor, plug-in, 4 pole motor, life time lubrication, thermally protected, suitable for continuous operation. Rated 120 volts, 60 hz.

• **Fan Housing**
 PC/ABS polymeric, dimensions 8 1/2" x 9 1/8" x 3 7/8".



• **Oval Duct Collar**
 Plastic collar for 4" duct connection, comes complete with built in non-metallic back draft damper for quiet operation. Oval design accepts standard 4" round ducting and fits into standard 2" x 4" walls.



• **Ventilating Area**
 For bathrooms up to 65 sq. ft. For other rooms up to 85 sq. ft.

• **Unit Mounting**
 Designed to mount in walls or ceilings with at least 4" of clearance. The unit is mounted directly to the joist or stud using a separate lock-in bracket (included with unit). The housing will mount through drywall thickness up to 3/4", with a rough-in opening of 8 1/2" x 9 1/8".

• **Single Pack Shipping Info**
 Box Dim: 11" x 12" x 6"
 UPC: 0-8316227501-1
 Shipping Weight: 5 1/4 lbs.
 Available in contractor packs of 4 housings - model BFQ2HSG

Suitable for wall insert mounting when discharged vertically and mounted outside of shower enclosure

EXPANDED PERFORMANCE

	Static Pressure (inches of w.g.)							Sones @ .1 SP	Fan Speed RPM	Maximum Fan Watts	Amps
	0	0.05	0.1	0.125	0.15	0.2	0.25				
Air Flow - CFM	79	74	70	68	66	62	56	1.5	1300	22.3	0.3

PROJECT							ARCHITECT				
LOCATION							ENGINEER				
CONTRACTOR							SUBMITTED BY			DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		



Air King: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048