




SPECIFICATIONS
BFQ70W
 EXHAUST FANS

HVI 2100 CERTIFIED
70 CFM/1.5 Sones @ 0.10" SP.
56 CFM @ 0.25" SP.

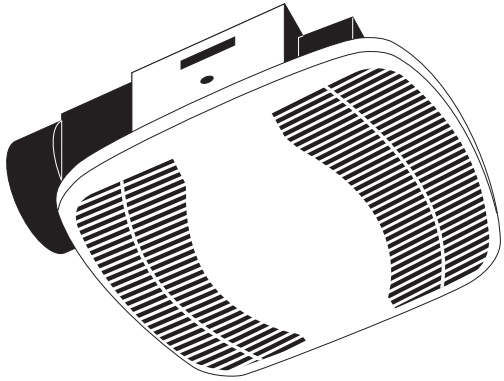

Grill

White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 10" x 10".

Blower Wheel

One piece polymeric wheel 5 1/8" diameter, 2 3/8" wide, with 48 fins.

Motor

Heavy duty, permanently split capacitor, plug-in, 4 pole motor, life time lubrication, thermally protected, suitable for continuous operation. Rated 120 volts, 60 hz.

Fan Housing

PC/ABS polymeric, dimensions 8 1/16" x 9 1/8" x 3 7/8".

Oval Duct Collar

Plastic collar for 4" duct connection, comes complete with built in non-metallic back draft damper for quiet operation. Oval design accepts standard 4" round ducting and fits into standard 2" x 4" walls.



Oval duct collar allows fan to be installed into walls using standard 2" x 4" studs.

Ventilating Area

For bathrooms up to 65 sq. ft. For other rooms up to 85 sq. ft.

Single Pack Shipping Info

Box Dim: 11 1/16" x 14" x 6 3/16"

UPC: 0-8316294157-2

Shipping Weight: 5 1/4 lbs.

Available in contractor packs of 4 housings - model BFQ2HSG

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.



Unit Mounting

Designed to mount in walls or ceilings with at least 4" of clearance. The unit is mounted directly to the joist or stud using a separate lock-in bracket (included with unit). The housing will mount through drywall thickness up to 3/4", with a rough-in opening of 8 1/2" x 9 1/8".

Suitable for wall insert mounting when discharged vertically and mounted outside of shower enclosure

EXPANDED PERFORMANCE											
	Static Pressure (inches of w.g.)							Sones @ .1 SP	Fan Speed RPM	Maximum Fan Watts	Amps
	0	0.05	0.1	0.125	0.15	0.2	0.25				
Air Flow - CFM	79	74	70	68	66	62	56	1.5	1300	22.3	0.3

PROJECT							ARCHITECT				
LOCATION							ENGINEER				
CONTRACTOR							SUBMITTED BY				DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		



U.S.: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada:
 Brampton, Ontario
 Tel: 905-456-2033
 Fax: (905) 456-1015

Specifications subject to change without notice.

Updated 2-18