



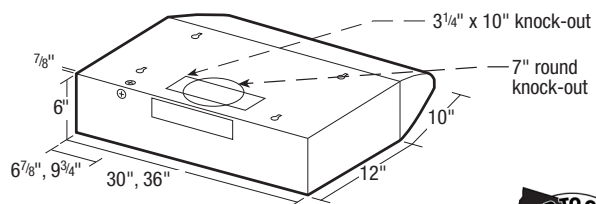

SPECIFICATIONS  
**EB SERIES**  
 RANGE HOODS

- HVI CERTIFIED** 2100
- 250 CFM/5.0 Sones (Horizontal) @ 0.10" SP.
  - 100 CFM/0.9 Sones (Horizontal) @ 0.03" SP.
  - 220 CFM/5.5 Sones (Vertical) @ 0.10" S.P.
  - 120 CFM/1.4 Sones (Vertical) @ 0.03" S.P.
  - 230 CFM/5.5 Sones (Round) @ 0.10" S.P.
  - 130 CFM/1.3 Sones (Round) @ 0.03" S.P.

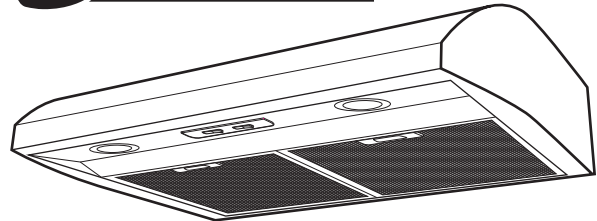

- Dimensions**  
 Overall bottom projection - 22"  
 Overall top projection - 12"  
 Height - 6"  
 Available widths: 30" & 36"
- Hood Body**  
 23 gauge cold rolled steel, laser welded, coated with a baked enamel finish or stainless steel.
- Motor**  
 High efficiency PSC 4 pole motor. Two speed, thermally protected, permanently lubricated. Rated 115/120 Volts, 50/60 hz.
- Lighting**  
 Includes two (2) - GU10 6.5 watt LED lamps.  
 4 watt night light (bulb not included)
- Ducting Options**  
 Horizontal ducting: 3/4"x10" (duct adapter and damper included).  
 Vertical ducting: 3/4"x10" (duct adapter and damper included).  
 Vertical ducting: 7" round (duct adapter and damper included).  
 Ductless: removable damper, top vent (charcoal filter not included).
- Blade**  
 Polymeric axial fan blade 10-3/8" diameter with 5 paddles.
- Electrical connection**  
 Hood top - 7/8" knockout hole for use with 1/2" cable clamp  
 Hood back - 7/8" knockout hole for use with 1/2" cable clamp

- Filters**  
 UL rated, class 2 filter.  
 Grease Filter (30" models): GF-09S, (included).  
 Grease Filter (36" models): GF-10S, (included).  
 Charcoal Filter (30" models): CF-09S (not included).  
 Charcoal Filter (36" models): CF-10S (not included).
- Available Finishes**  
 Stainless Steel (EB30SS, EB36SS), White (EB30WH, EB36WH)  
 Black (EB30BL, EB36BL)

EXPANDED PERFORMANCE										
Air Flow - CFM	Static Pressure (inches of w.g.)						Sones @ .1 SP	Fan Speed RPM	Power Watts	Amps
	0	0.03	0.1	0.125	0.15	0.2				
<b>Horz Ducting High Speed</b>	300	286	250	236	221	191	5.0	1670	67.0	1.2
<b>Horz Ducting Working Speed</b>	136	100	-	-	-	-	0.9	880	20.0	1.2
<b>Vert Ducting High Speed</b>	279	262	220	205	190	158	5.5	1680	65.4	1.2
<b>Vert Ducting Working Speed</b>	144	120	-	-	-	-	1.4	975	20.0	1.2
<b>Round Ducting High Speed</b>	302	286	230	207	183	137	5.5	1680	65.0	1.2
<b>Round Ducting Working Speed</b>	167	130	-	-	-	-	1.3	980	20.0	1.2

<b>PROJECT</b>							<b>ARCHITECT</b>			
<b>LOCATION</b>							<b>ENGINEER</b>			
<b>CONTRACTOR</b>							<b>SUBMITTED BY</b>			<b>DATE</b>
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



**U.S.:** 820 Lincoln Avenue  
 West Chester, Pennsylvania 19380-4466  
 Tel: (610) 692-7400 • 877-304-3785  
 Fax: (610) 696-8048

**Canada:**  
 Brampton, Ontario  
 Tel: 800-250-8767  
 Fax: (905) 456-1015