



**SPECIFICATIONS**  
**ESZADA**  
**SERIES**  
**RANGE HOODS**

	230 CFM/6.0 Sones (Horizontal) @ 0.10" SP.
	100 CFM/1.2 Sones (Horizontal) @ 0.03" SP.
	210 CFM/5.0 Sones (Vertical) @ 0.10" S.P.
	120 CFM/1.5 Sones (Vertical) @ 0.03" S.P.
	200 CFM/5.5 Sones (Round) @ 0.10" S.P.
	110 CFM/1.5 Sones (Round) @ 0.03" S.P.

**Dimensions**

Overall bottom projection - 18<sup>3</sup>/<sub>8</sub>"  
 Height - 6"  
 Available widths: 30" & 36"

**Hood Body**

Stainless Steel: 24 gauge, grade 430 stainless steel.  
 Painted: 23 gauge cold rolled commercial grade (CRCQ) steel, auto welded, coated with a baked enamel finish.

**Motor/Blade**

Fully enclosed PSC 4 pole motor. 3 speed, thermally protected, permanently lubricated. Rated 115/120 Volts, 60 hz. Polymeric axial fan blade 9<sup>1</sup>/<sub>8</sub>" diameter with 7 paddles.

**Controls**



Wall mounted dual rocker switch with plate, white finish. Fits into a triple gang box.

**Lighting**


Includes 6 Watt GU24 base LED lamp (included).  
 4 watt night light (bulb not included)

**Ducting Options**

Horizontal ducting: 3<sup>1</sup>/<sub>4</sub>"x10" (duct adapter and damper included).  
 Vertical ducting: 3<sup>1</sup>/<sub>4</sub>"x10" (duct adapter and damper included).  
 Vertical ducting: 7" round (duct adapter and damper not included).  
 Ductless: removable front vent (charcoal filter not included).

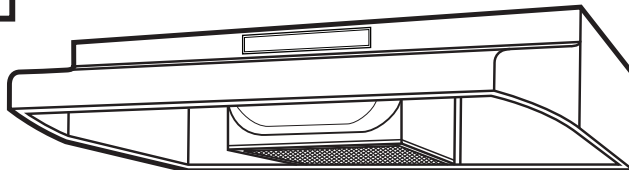

**Included Wall Control**

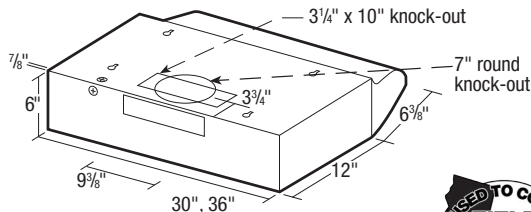

**Filters**

UL rated, class 2 filter.  
 Grease Filter: GF-08 (included).  
 Charcoal Filter: CF-08 (not included).

**Available Finishes**

Stainless Steel (ESZ308ADA, ESZ368ADA)  
 White (ESZ303ADA, ESZ363ADA)  
 Black (ESZ306ADA, ESZ366ADA)



**Compliant with ADA**  
 (Americans with Disabilities Act)

EXPANDED PERFORMANCE										
Air Flow - CFM	Static Pressure (inches of w.g.)						Sones @ .1 SP	Fan Speed RPM	Power Watts	Amps
	0	0.03	0.1	0.125	0.15	0.2				
Horz Ducting High Speed	287	269	230	216	202	172	6.0	1656	69.0	0.9
Horz Ducting Working Speed	139	100	-	-	-	-	1.2	860	22.0	
Vert Ducting High Speed	268	250	210	195	179	148	5.0	1670	68.0	
Vert Ducting Working Speed	140	120	-	-	-	-	1.5	860	22.0	
Round Ducting High Speed	268	246	200	181	163	127	5.5	1674	67.0	
Round Ducting Working Speed	139	110	-	-	-	-	1.5	1008	22.0	

<b>PROJECT</b>							<b>ARCHITECT</b>		
<b>LOCATION</b>							<b>ENGINEER</b>		
<b>CONTRACTOR</b>							<b>SUBMITTED BY</b>		<b>DATE</b>
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS



**Air King:** 820 Lincoln Avenue  
 West Chester, Pennsylvania 19380-4466  
 Tel: (610) 692-7400 • 877-304-3785  
 Fax: (610) 696-8048

**Canada:**  
 Brampton, Ontario  
 Tel: 905-456-2033  
 Fax: (905) 456-1015

\* The ENERGY STAR Program for Residential Ventilating Fans has no provision for qualification of ductless range hoods (recirculating not ventilating), as a result the ENERGY STAR program applies to ducted range hoods only. Specifications subject to change without notice.