



SPECIFICATIONS  
**P10 SERIES**  
 RANGE HOODS

## Professional Series Range Hood

• **Hood Dimensions**

Overall bottom projection - 24"  
 Available height (without Soffit) -10"  
 Available widths: 30" and 36"

• **Hood**

Stainless steel. Wall mounted. Install at least 24" above the cooking surface.

• **Thermostat**


Thermostat detects when the heat level rises to an excessive amount and automatically turns the hood on.

• **Lighting**

2 - PAR16, 3.125" in length, type A screw-in base, 45 watt maximum Halogen lamps (included).

• **Heat Lamps** (model P1036W)

2 - type R40, medium base IR 250W (not included).

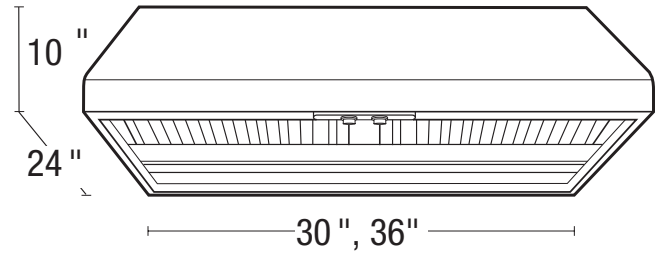

• **Ducting Options**

Vertical outlet only. Vertical or Horizontal ducting transition achieved through vertical or horizontal duct adapter (available separately) specified for size of motor.

• **Filters**

Grease Baffles: Dishwasher safe, Stainless Steel baffles (included).

### BLOWERS SOLD SEPARATELY

Model	Description	Width	Height
P1030	Range Hood	30"	10"
P1036	Range Hood	36"	10"
P1036W	Range Hood w/Heat Lamps	36"	10"

Motor Size	POWER USAGE					
	30"		36"		36" w/Heat Lamps	
	Full Load Amps	Breaker Size	Full Load Amps	Breaker Size	Full Load Amps	Breaker Size
300 CFM	1.7 amps	15 amp	1.7 amps	15 amp	5.9 amps	15 amp
500 CFM	1.9 amps	15 amp	1.9 amps	15 amp	6.1 amps	15 amp
600 CFM	2.1 amps	15 amp	2.1 amps	15 amp	6.3 amps	15 amp
900 CFM	6.5 amps	15 amp	6.5 amps	15 amp	10.7 amps	15 amp
1200 CFM	8.0 amps	15 amp	8.0 amps	15 amp	12.2 amps	20 amp

Breaker Size is listed at the recommended minimum size. Installation must be in accordance with all applicable codes and standards.

<b>PROJECT</b>							<b>ARCHITECT</b>				
<b>LOCATION</b>							<b>ENGINEER</b>				
<b>CONTRACTOR</b>							<b>SUBMITTED BY</b>			<b>DATE</b>	
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		



**Air King:** 820 Lincoln Avenue  
 West Chester, Pennsylvania 19380-4466  
 Tel: (610) 692-7400 • 877-304-3785  
 Fax: (610) 696-8048

**Canada:**  
 Brampton, Ontario  
 Tel: 905-456-2033  
 Fax: (905) 456-1015