



## SPECIFICATIONS

# D4S

## VARIABLE AIRFLOW SINGLE SPEED EXHAUST FAN



120 CFM/0.3 Sones @ 0.10" SP. / 121 @ 0.25" SP.  
110 CFM/<0.3 Sones @ 0.10" SP. / 112 @ 0.25" SP.  
100 CFM/<0.3 Sones @ 0.10" SP. / 100 @ 0.25" SP.  
90 CFM/<0.3 Sones @ 0.10" SP. / 89 @ 0.25" SP.  
80 CFM/<0.3 Sones @ 0.10" SP. / 77 @ 0.25" SP.

70 CFM/<0.3 Sones @ 0.10" SP. / 68 @ 0.25" SP.  
60 CFM/<0.3 Sones @ 0.10" SP. / 58 @ 0.25" SP.  
50 CFM/<0.3 Sones @ 0.10" SP. / 51 @ 0.25" SP.  
40 CFM/<0.3 Sones @ 0.10" SP. / 38 @ 0.25" SP.

### Grill

White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 14 $\frac{1}{4}$ " x 14 $\frac{1}{4}$ ".

### Blower Wheel

Balanced polymeric dual inlet blower wheel secured in place using a hex nut.

### Adjustable Capacity DC Motor

9 capacity settings allow the fan to be set to the required exhaust rate for continuous ventilation. Set points include:

40 50 60 70 80 90 100 110 & 120 CFM

Quiet DC motor maintains CFM ratings across multiple static pressures, suitable for continuous operation, permanently lubricated, 115/120V 60 Hz., 0.4 amps. Maximum fan watts @ 0.1 SP.: 7.3 watts

Ideal for compliance with ASHRAE 62.2, LEED, ENERGY STAR® for Homes, California Title 24 and other programs.

### Fan Housing

23 gauge galvanized steel housing. Overall dimensions: 12 $\frac{7}{8}$ " x 12 $\frac{3}{4}$ " x 9 $\frac{7}{8}$ ".

### Duct Collar

6" round, zinc plated metal collar adapter. Gasketed, spring loaded aluminum backdraft damper.

### Electrical Connections


$\frac{1}{2}$ " electrical knockouts provided. Easy wiring access via either internal or external wiring compartment cover.

### Single Pack Shipping Info

Box Dim: 20" x 15 $\frac{7}{8}$ " x 11 $\frac{3}{8}$ "

UPC: 0-8316294400-9

Shipping Weight: 14.1 lbs.

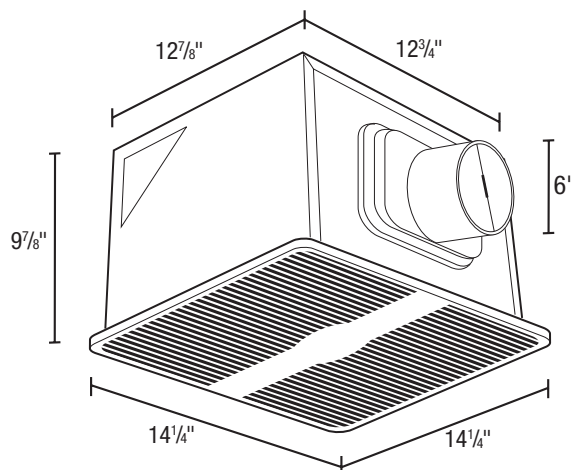

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.



### Unit Mounting

The housing will mount through drywall thickness up to  $\frac{3}{4}$ ", with a rough-in opening of 13" x 12 $\frac{7}{8}$ ". The housing will mount either between 16" or 24" on center joists, using the 2 supplied housing mounting brackets. The housing mounting brackets can be adapted for overhead mounting (hardware not provided). The unit is provided with an optionally installed ceiling flange to ensure proper building infiltration rates are maintained and that no air leaks occur between the fan housing and ceiling cutout.

## SEE REVERSE SIDE FOR STATIC PRESSURE RANGES

PROJECT							ARCHITECT		
LOCATION							ENGINEER		
CONTRACTOR							SUBMITTED BY		DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS



U.S.: 820 Lincoln Avenue  
West Chester, Pennsylvania 19380-4466  
Tel: (610) 692-7400 • 877-304-3785  
Fax: (610) 696-8048

Canada:  
Brampton, Ontario  
Tel: 905-456-2033




## SPECIFICATIONS

# D4S

VARIABLE AIRFLOW SINGLE  
SPEED EXHAUST FAN

## ACHIEVABLE STATIC PRESSURES

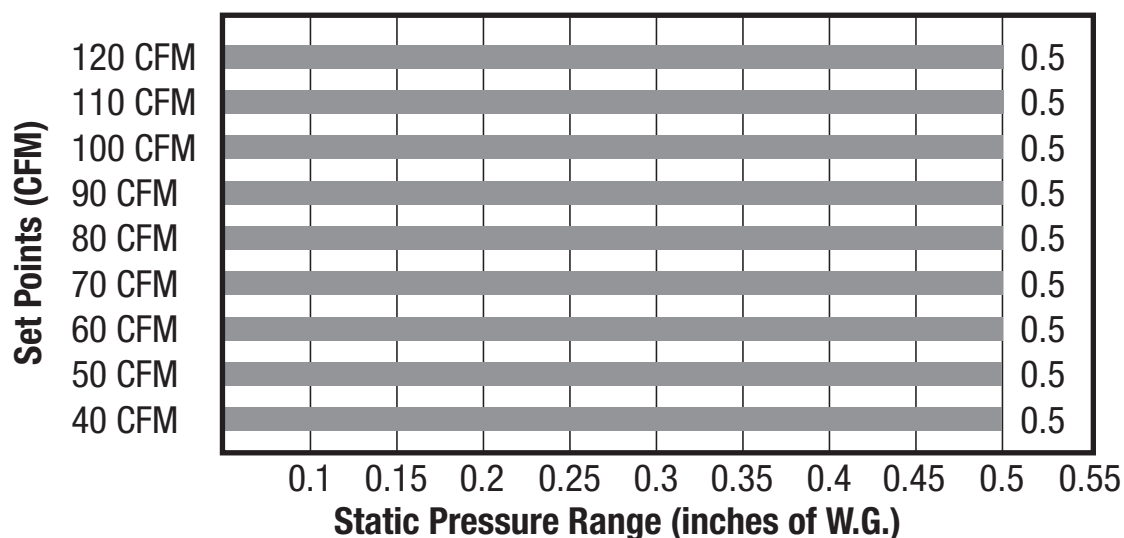

## SOUND POWER LEVEL (dB)

Airflow @ 0.1"	Full Octave Band Center Frequency (Hz)								Sones
	63	125	250	500	1k	2k	4k	8k	
120	34.7	40.9	44.4	40.3	39.0	30.6	20.2	8.8	0.3
110	34.7	40.3	44.1	40.1	38.0	29.5	19.0	7.7	<0.3
100	33.8	39.8	43.8	39.5	37.1	28.6	18.0	7.0	<0.3
90	34.5	38.2	42.2	37.5	35.4	26.6	16.0	5.7	<0.3
80	35.1	37.9	41.9	36.8	34.9	25.6	15.2	5.7	<0.3
70	34.8	37.9	41.0	36.2	33.4	24.1	13.6	5.1	<0.3
60	34.4	38.1	40.5	35.5	32.3	22.6	12.7	4.4	<0.3
50	33.4	37.3	40.5	35.4	32.2	22.2	12.7	4.5	<0.3
40	32.8	37.5	39.7	34.9	31.5	21.6	12.0	4.1	<0.3

Airflow @ 0.25"	Full Octave Band Center Frequency (Hz)								Sones
	63	125	250	500	1k	2k	4k	8k	
120	38.3	45.6	49.0	44.5	43.1	33.8	22.1	9.4	0.7
110	39.1	45.9	49.7	45.2	42.8	33.1	21.1	8.3	0.7
100	37.5	44.6	48.5	43.9	41.1	31.6	19.7	7.3	0.5
90	39.4	44.0	48.1	42.7	40.3	30.2	17.8	6.0	0.4
80	39.7	42.9	47.1	41.2	39.1	28.6	16.6	5.9	0.3
70	39.7	43.5	46.6	41.1	37.9	27.2	15.0	5.3	<0.3
60	40.5	45.2	47.5	41.5	37.7	26.2	14.2	4.5	<0.3
50	38.8	43.7	46.9	40.9	37.1	25.5	14.1	4.6	<0.3
40	39.2	45.1	47.2	41.2	37.3	25.3	13.6	4.1	<0.3



**U.S.:** 820 Lincoln Avenue  
West Chester, Pennsylvania 19380-4466  
Tel: (610) 692-7400 • 877-304-3785  
Fax: (610) 696-8048

**Canada:**  
Brampton, Ontario  
Tel: 905-456-2033