



SPECIFICATIONS

E80SH

EXHAUST FAN



80 CFM / <0.3 Sones @ 0.10" SP.
110 CFM / 0.7 Sones @ 0.10" SP. (Boost)
84 CFM @ 0.25 SP. (Boost)

• Grill

White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 14⁷/₁₆" x 14⁷/₁₆".

• Blower Wheel

Balanced polymeric dual inlet blower wheel secured in place using a hex nut.

• Motor

Enclosed 4 pole high efficiency, permanently split capacitor motor (PSC); life time lubrication, suitable for continuous operation. Motor bearings - ball. Rated 115/120 volts, 60 Hz.

• Fan Housing

23 gauge galvanized steel housing.
 Overall dimensions: 12⁷/₈" x 12³/₄" x 9⁷/₈".

• Humidity Sensor

Integrated humidity sensor automatically turns fan on until the desired humidity level is reached.

• Duct Collar


6" round, zinc plated metal collar adapter. Gasketed, spring loaded aluminum backdraft damper.

• Electrical Connections

1/2" electrical knockouts provided. Easy wiring access via either internal or external wiring compartment cover.

• Single Pack Shipping Info

Box Dim: 20" x 15⁷/₈" x 11³/₈"
 UPC: 0-8316294128-2
 Shipping Weight: 14.5 lbs.

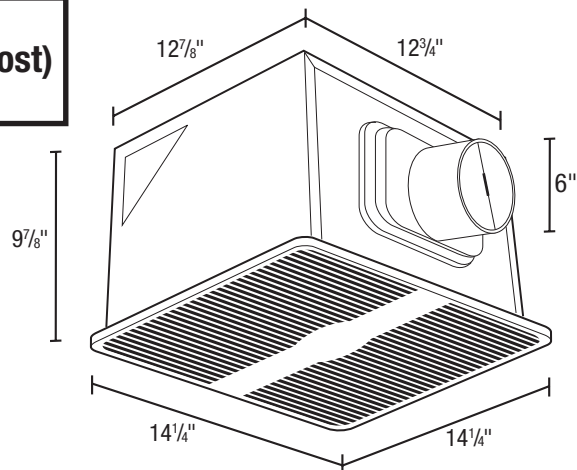

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.



• Unit Mounting

The housing will mount through drywall thickness up to 3/4", with a rough-in opening of 13" x 12⁷/₈". The housing will mount either between 16" or 24" on center joists, using the 2 supplied housing mounting brackets. The housing mounting brackets can be adapted for overhead mounting (hardware not provided). The unit is provided with an optionally installed ceiling flange to ensure proper building infiltration rates are maintained and that no air leaks occur between the fan housing and ceiling cutout.

EXPANDED PERFORMANCE

	Static Pressure (inches of w.g.)						Sones @ .1 SP	Fan Speed RPM	Maximum Power Watts	Amps
	0	0.05	0.1	0.15	0.20	0.25*				
Air Flow - CFM	111	95	80	67	53	31/84	<0.3	760	37.0	0.3

* Boost speed provides 84 CFM @ .25 Static Pressure, 0.7 sones

PROJECT							ARCHITECT			
LOCATION							ENGINEER			
CONTRACTOR							SUBMITTED BY		DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



U.S.: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada:
 Brampton, Ontario
 Tel: 905-456-2033