





SPECIFICATIONS
AKZA150
 INLINE FAN

HVI 2100
 CERTIFIED **120 CFM @ 0.20" SP.**

- **Blower Wheel**
Balanced polymeric dual inlet blower wheel secured in place using a hex nut.
- **Motor**
Enclosed 4 pole high efficiency, permanently split capacitor motor (PSC); life time lubrication, suitable for continuous operation. Motor bearings - sleeve. Rated 115/120 volts, 60 Hz.
- **Fan Housing**
23 gauge galvanized steel housing with 1" thermal & acoustical insulation and a removable bottom access panel for servicing. Overall dimensions: 12¹¹/₁₆" W x 13¹/₁₆" D x 12⁹/₁₆" H.
- **Duct Collar**
6" round, zinc plated metal collar adapter. Gasketed, spring loaded aluminum backdraft damper.
- **Electrical Connections**
0.5" electrical knockouts provided. Easy wiring access via either internal or external wiring compartment cover.
- **Single Pack Shipping Info**
Shipping Weight: 17 lbs.

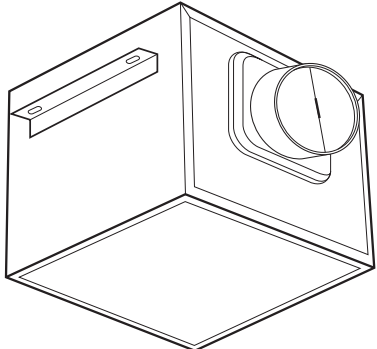

- **Unit Mounting**
2 supplied housing mounting angles. The housing mounting angles can be adapted for inline or top discharge mounting (hardware not provided).

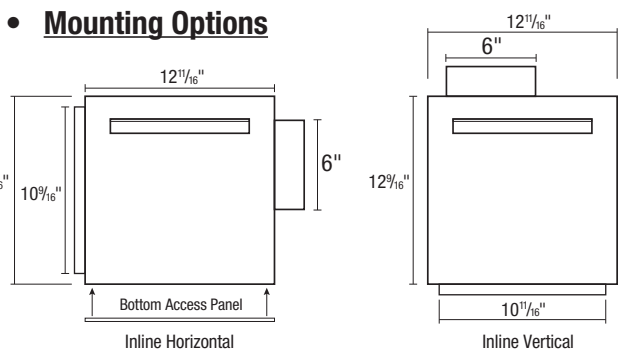

EXPANDED PERFORMANCE

| | Static Pressure (inches of w.g.) | | | | | | | Fan Speed RPM | Maximum Fan Watts | Amps |
|-----------------------|----------------------------------|-----|-------|-----|------|-------|-----|------------------|----------------------|------|
| | 0 | 0.1 | 0.125 | 0.2 | 0.25 | 0.375 | 0.5 | | | |
| Air Flow - CFM | 167 | 150 | 145 | 120 | 117 | 82 | - | 839 | 34.4 | 0.3 |

| | |
|-------------------|--|
| PROJECT | ARCHITECT |
| LOCATION | ENGINEER |
| CONTRACTOR | SUBMITTED BY DATE |

| FAN NUMBER | MODEL NUMBER | CFM | IN W.G. | RPM | WATTS | AMPS | SONES | QTY | OPTIONAL EQUIPMENT & REMARKS |
|------------|--------------|-----|---------|-----|-------|------|-------|-----|------------------------------|
| | | | | | | | | | |



Air King: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada:
 Bolton, Ontario
 Tel: 905-456-2033