



SPECIFICATIONS

F130D

FRESH AIR SUPPLY FAN



130 CFM @ 0.20" SP.
80 CFM @ 0.20" SP.
30 CFM @ 0.20" SP.

- **Blower Wheel**

Balanced polymeric dual inlet blower wheel secured in place using a hex nut.

- **Adjustable Capacity Motor**

Variable capacity settings allow the fan to be set from 30 to 130 CFM
 4 pole ECM motor, permanently lubricated, thermally protected
 115/120V 60 Hz., 0.50 amps.

Fan Efficacy: 5 CFM/Watt at 130 CFM, 0.2" SP.

Static Pressure Range: Up to 0.4" SP.

- **Fan Housing**

Insulated 26 gauge baked epoxy housing. Overall dimensions:
 14⁷/₈"H x 11¹/₂"D x 10¹/₈"W.

- **Duct Collars**

6" round, zinc plated metal collar adapters.

- **Electrical Connections**

0.5" electrical access. Easy wiring access via external wiring compartment cover or internal access plate.

- **Unit Mounting**

Designed to surface mount to a wall or ceiling with the included mounting brackets. Can be mounted onto joists, studs or the housing mounting brackets can be adapted for overhead mounting (hardware not provided).

- **Optional Air Filter**

An optional 10" x 10" x 2" air filter can be added to the unit (not included).



- **Test Port**

Allows easy air flow measurement with Pitot tube or similar device.

- **Single Pack Shipping Info**

Box Dim: 23" x 15⁷/₈" x 12³/₄"

Shipping Weight: 17.7 lbs.

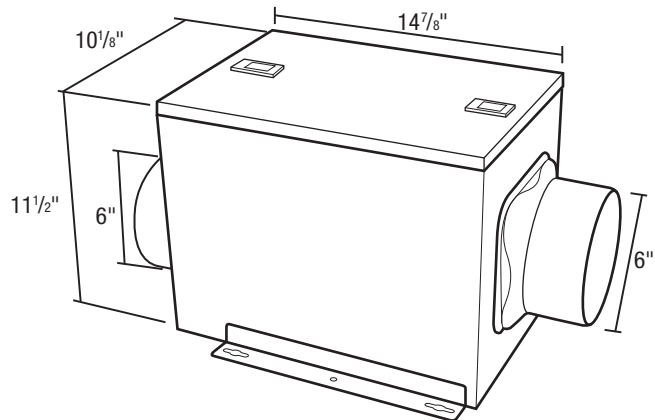

PROJECT							ARCHITECT		
LOCATION							ENGINEER		
CONTRACTOR							SUBMITTED BY		DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS



U.S.: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada:
 Brampton, Ontario
 Tel: 905-456-2033




SPECIFICATIONS

F130D

FRESH AIR SUPPLY FAN

Model F130D Fan Curve

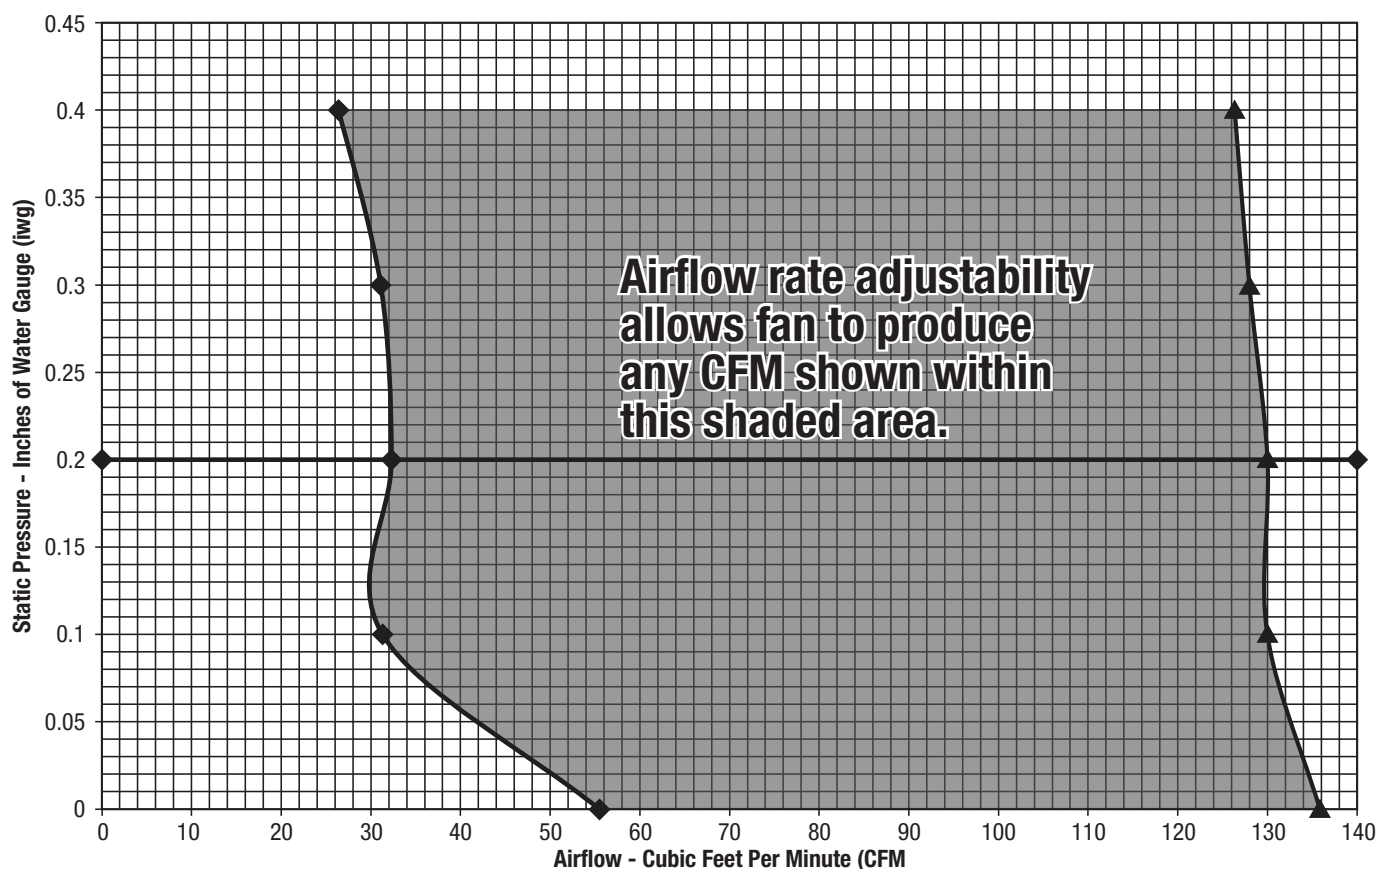

U.S.: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada:
Brampton, Ontario
Tel: 905-456-2033