



SPECIFICATIONS
PROFESSIONAL
 RANGE HOODS

Professional Series 18" Height Wall Mounted Range Hood

• **Hood Dimensions**

Overall bottom projection - 24"
 Available height (less Soffit) - 18"
 Available widths: 36", 42" and 48"

• **Hood**

Stainless steel. Wall mounted. Install at least 24" above the cooking surface.

• **Lighting**

36" widths: 2 - PAR16 medium screw base, 45 watt maximum Halogen lamps (not included).

42", 48" widths: 3 - PAR16 medium screw base, 45 watt maximum Halogen lamps (not included).

• **Heat Lamps** (models P1836W, P1842W, P1848W)


2 - 175 watt maximum Type PAR38 heat lamps (not included).

• **Ducting Options**


Vertical or Horizontal ducting through ducting transition (not included) specified for size of motor.

• **Filters**

Grease Baffles: Dishwasher safe, Stainless Steel baffles (included).

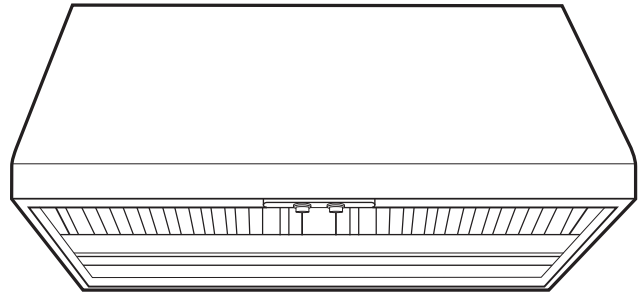

P18 SERIES

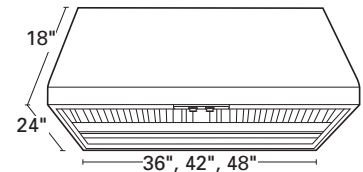

Model	Description	Width	Height
P1836	Range Hood	36"	18"
P1842	Range Hood	42"	18"
P1848	Range Hood	48"	18"

Model	Description	Width	Height
P1836W	Range Hood w/Heat Lamps	36"	18"
P1842W	Range Hood w/Heat Lamps	42"	18"
P1848W	Range Hood w/Heat Lamps	48"	18"

Motor Size	POWER USAGE											
	36"		36" w/Heat Lamps		42"		42" w/Heat Lamps		48"		48" w/Heat Lamps	
	Full Load Amps	Breaker Size	Full Load Amps	Breaker Size	Full Load Amps	Breaker Size	Full Load Amps	Breaker Size	Full Load Amps	Breaker Size	Full Load Amps	Breaker Size
300 CFM	1.7 amps	15 amp	5.9 amps	15 amp	2.2 amps	15 amp	6.3 amps	15 amp	2.2 amps	15 amp	6.3 amps	15 amp
500 CFM	1.9 amps	15 amp	6.1 amps	15 amp	2.4 amps	15 amp	6.5 amps	15 amp	2.4 amps	15 amp	6.5 amps	15 amp
600 CFM	2.1 amps	15 amp	6.3 amps	15 amp	2.5 amps	15 amp	6.7 amps	15 amp	2.5 amps	15 amp	6.7 amps	15 amp
900 CFM	6.5 amps	15 amp	10.7 amps	15 amp	7.0 amps	15 amp	11.1 amps	15 amp	7.0 amps	15 amp	11.1 amps	15 amp
1200 CFM	8.0 amps	15 amp	12.2 amps	20 amp	8.5 amps	15 amp	12.6 amps	20 amp	8.5 amps	15 amp	12.6 amps	20 amp

Breaker Size is listed at the recommended minimum size. Installation must be in accordance with all applicable codes and standards.

PROJECT							ARCHITECT					
LOCATION							ENGINEER					
CONTRACTOR							SUBMITTED BY					DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS			



U.S.: 820 Lincoln Drive
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada: 110 Glidden Road
 Brampton, Ontario L6T 2J3
 Tel: (905) 456-2033
 Fax: (905) 456-1015