





SPECIFICATIONS
AP1836
 RANGE HOOD

HVI 2100
 CERTIFIED **900 CFM/11.0 Sones @ 0.10" SP.**

- **Hood Dimensions**
 Overall bottom projection - 24"
 Height (without Soffit) - 18"
 Width: 36"
- **Hood**
 Stainless steel. Wall mounted. Install at least 24" above the cooking surface.
- **Lighting**
 3 - PAR16, 3.125" in length, type A screw-in base, 45 watt maximum Halogen lamps (included).
- **Ducting Options**
 Vertical outlet only. Vertical or Horizontal ducting transition achieved through vertical (included) or horizontal (optional) outlet adapter.
- **Filters**
 Aluminum grease filters (included).
- **Blower**
 Three speed, permanently split capacitor motor. Rated 120 volts, 60 hz.
- **Blower Wheel**
 Dual inlet, electronically balanced polymeric centrifugal blower wheels, 57/8" width 59 paddles.

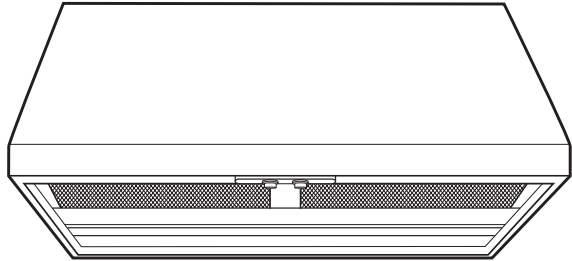

EXPANDED PERFORMANCE

Air Flow - CFM	Static Pressure (inches of w.g.)						Sones @ .1 SP	Fan Speed RPM	Maximum Fan Watts	Amps
	0	0.1	0.25	0.375	0.5	0.625				
High Speed	918	900	874	852	829	805	11.0	2051	605	5.7

PROJECT					ARCHITECT				
LOCATION					ENGINEER				
CONTRACTOR					SUBMITTED BY			DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS



U.S.: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada:
 Brampton, Ontario
 Tel: 800-250-8767
 Fax: (905) 456-1015