






SPECIFICATIONS
ADA SERIES
RANGE HOOD

2100 HVI CERTIFIED
250 CFM/4.0 Sones (Vertical) @ 0.10" S.P.
150 CFM/1.5 Sones (Vertical) @ 0.10" S.P.
250 CFM/4.0 Sones (Horizontal) @ 0.10" SP.
150 CFM/1.5 Sones (Horizontal) @ 0.10" SP.

- **Dimensions**
Overall bottom projection - 19 1/2"
Height - 7 1/2"
Widths - 24", 30", 36"
- **Hood Body**
Stainless Steel or 24 gauge cold rolled steel, auto welded, powder coated
- **Motor**
2 speed, thermally protected, permanently lubricated motor. Rated 120 volts, 60 hz. with two electronically balanced blower wheels.
- **Controls**
Wall mounted dual rocker switch with plate, white finish. Fits into a triple gang box.
- **Lighting**
Includes 8 Watt GU24 base LED lamp (bulb included)
4 watt night light (bulb not included)
- **Ducting Options**
Horizontal ducting: 3 1/4"x10" (duct adapter and damper included)
Vertical ducting: 3 1/4"x10" (duct adapter and damper included)
Ductless*: removable front vent (charcoal filter not included)
- **Filters**
Grease Filter: Dishwasher safe, GF-01 (included).
Charcoal Filter: CF-01 (not included).
- **Available Finishes**
Stainless Steel (ES248ADA, ES308ADA, ES368ADA)
White (ES243ADA, ES303ADA, ES363ADA), Biscuit (ES244ADA, ES304ADA, ES364ADA),
Almond (ES245ADA, ES305ADA, ES365ADA), Black (ES246ADA, ES306ADA, ES366ADA)

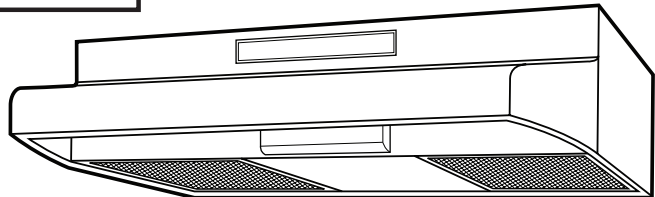

Included Wall Control

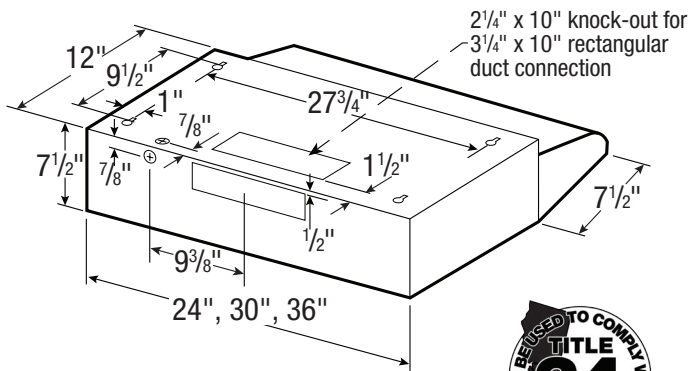

Compliant with ADA
(Americans with Disabilities Act)

| EXPANDED PERFORMANCE | | | | | | | | | | |
|--------------------------------|----------------------------------|-----|-------|------|-----|------|------------------|------------------|----------------|------|
| <i>Air Flow - CFM</i> | Static Pressure (inches of w.g.) | | | | | | Sones @ .1 SP | Fan Speed RPM | Power Watts | Amps |
| | 0 | 0.1 | 0.125 | 0.15 | 0.2 | 0.25 | | | | |
| Horz Ducting High Speed | 288 | 250 | 242 | 233 | 208 | 174 | 4.0 | 1653 | 73.0 | 1.0 |
| Horz Ducting Low Speed | 163 | 150 | 144 | 137 | 66 | - | 1.5 | 1229 | 41.0 | 1.0 |
| Vert Ducting High Speed | 287 | 250 | 242 | 233 | 208 | 178 | 4.0 | 1653 | 73.0 | 1.0 |
| Vert Ducting Low Speed | 159 | 150 | 148 | 142 | 114 | 44 | 1.5 | 1189 | 41.3 | 1.0 |

| PROJECT | | | | | | | ARCHITECT | | | |
|-------------------|--------------|-----|---------|-----|-------|------|---------------------|-----|------------------------------|-------------|
| LOCATION | | | | | | | ENGINEER | | | |
| CONTRACTOR | | | | | | | SUBMITTED BY | | | DATE |
| FAN NUMBER | MODEL NUMBER | CFM | IN W.C. | RPM | WATTS | AMPS | SONES | QTY | OPTIONAL EQUIPMENT & REMARKS | |
| | | | | | | | | | | |



Air King: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada:
Brampton, Ontario
Tel: 905-456-2033
Fax: (905) 456-1015

* The ENERGY STAR Program for Residential Ventilating Fans has no provision for qualification of ductless range hoods (recirculating not ventilating), as a result the ENERGY STAR program applies to ducted range hoods only. Specifications subject to change without notice. Updated 2-18